



L
I
G
H
T

S
O
L
A
R



2026

Innovation And Sustainability For Everyone



GRACE LED LIGHTING

Grace is committed to making the world green and safe through technology and innovation.

To be one of the most reliable, recognized and innovative brands in the EU market in 2025.



Stay Innovative

Innovation is an essential element of Grace's DNA. We are concerned about technological changes and market trends, stay creative and innovative based on end-user needs and wants, and continue to provide customers with additional value.



Be Grateful

Thanks to the past obstacles, they make us stronger. Thanks to our customers, they help us grow, creating a solid partnership with them. Thanks for all the good things that happened to us; they make us more competitive and accomplished. Our clients are the cornerstone of our company.



Stay Focused

Devote to innovation and service of green LED lighting with all our resources and efforts, and keep fighting.



Be Responsible

Offer our employees challenging working opportunities, be committed to Stake Holders' interests, be concerned with environmental protection and energy conservation, and take full responsibility for CSR.

ABOUT GRACE

Grace Lighting began its journey in 2014 as a professional LED lighting manufacturer and solution provider in Ningbo, China.

Our products and service cover the residential, industrial, commercial, and public sectors.

With over 10 years of R&D experience, Grace gained its high reputation by fulfilling various customers' needs.

The R&D, Sales, and Marketing departments work together to develop future products, to fulfill market needs and tendencies every time we launch new items.

Advanced R&D Department, constant product innovation ability, and excellent sales service are the keys to our customer satisfaction from 5 continents and over 70 countries choose us.

10+ Years

70+ Certifications

12+ Categories

500+ Products

40+ Sales and R&D staff

2W+ Square Meters

GRACE

ADVANTAGES

01

Grace Lighting is one of the earliest manufacturers specializing in R&D, manufacturing, and selling LED products in China.

We are remarkable in supply chain management and Master-level product recommendation, which help our clients realize their minimum inventory.

02

With a friendly & knowledgeable service team, the response time is 50% shorter than the average.

Meanwhile, Grace Lighting has a professional Marketing Department, offering clients customized senior-level marketing materials and other support.

04

Grace Lighting owns professional laboratories approved by TUV and over 12 mainstream certificates, and our engineers have 12-year work experience on average, all of which ensure the high quality of our products.

03

Our team has participated in the world's top exhibitions for 19 consecutive years, pays constant attention to technological changes and market needs, and launches over 30 new products yearly.

05

Visionary thinking: The R&D, Sales, and Marketing departments work together to develop the products of the future to determine market needs and tendencies every time we launch new items.

GRACE TEAM



■ D E D I C A T E D
■ D R E A M

■ P R O F E S S I O N A L
■ E N E R G E T I C



TESTING AT GRACE OWN
PREMISES LAB



R&D TEAM



MARKETING & SALES
STAFF

PRODUCT SERIES

01 SOLAR HYBRID LIGHT



02 SOLAR FLOOD LIGHT



03 SOLAR WALL LIGHT



04 SOLAR SECURITY LIGHT



05 SOLAR GARDEN LIGHT



06 SOLAR STREET LIGHT



07 SOLAR ROAD STUD LIGHT




An aerial night photograph of a suburban neighborhood. A winding asphalt road curves through the center of the frame, illuminated by warm yellow streetlights. On either side of the road are several two-story houses with dark roofs and light-colored siding. Many of the houses have their interior lights on, and some have cars parked in their driveways. The houses are surrounded by lush green lawns and dense trees. The overall scene is peaceful and well-lit.

01

SOLAR
HYBRID LIGHT



SOLAR HYBRID LIGHT WORKING MODE

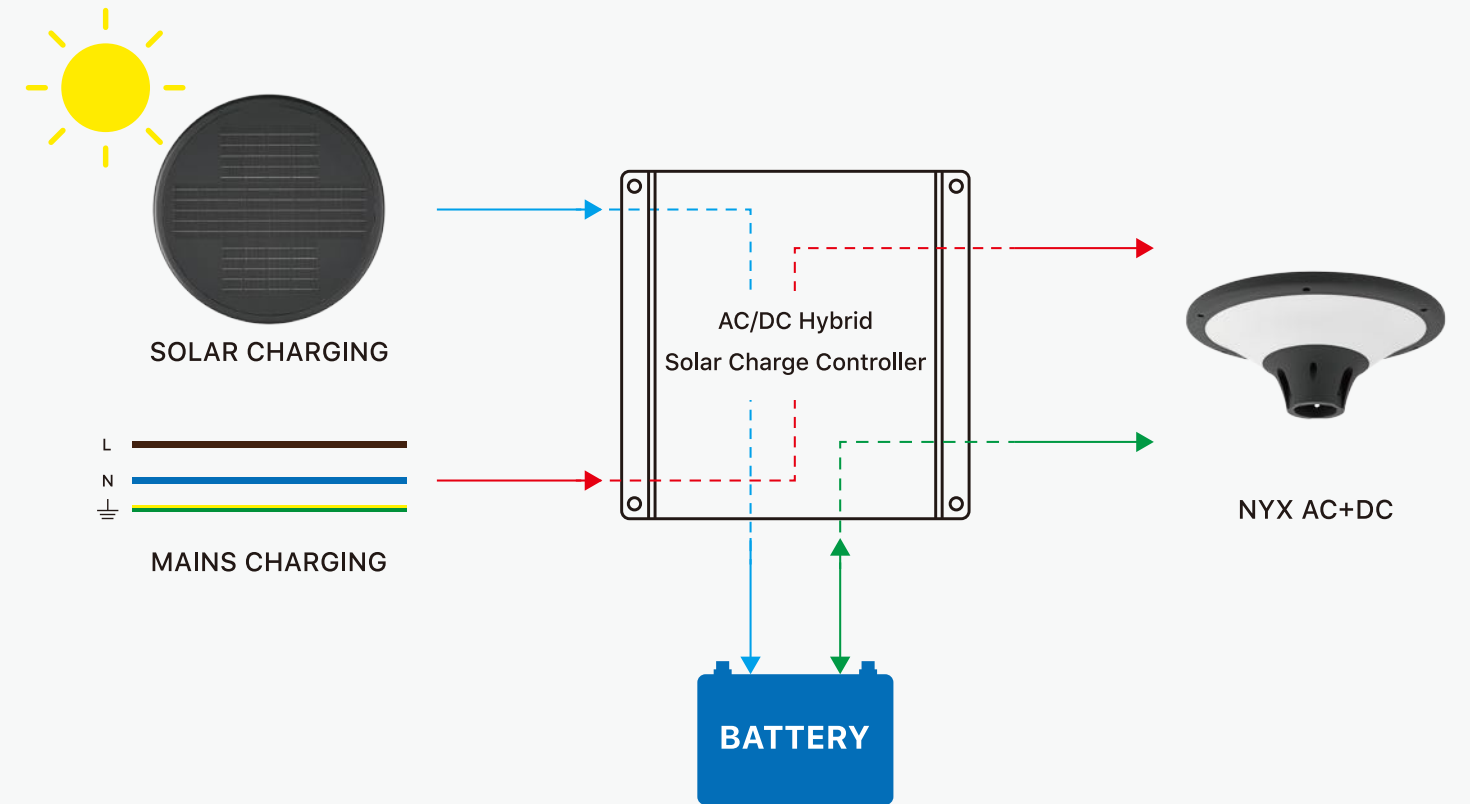

→ BLUE LINE

The hybrid solar lights have solar panels to tap solar energy during the day (>100 Lux). This solar energy is stored in the battery for use later.

→ GREEN LINE

Solar Energy Priority:

Hybrid solar lights will prioritize using the solar energy stored in the battery to work in the night (<100Lux).

When the battery power is sufficient (more than 10%) from the solar panel, the system automatically switches to solar power.

→ RED LINE

AC-Grid Power Priority:

Hybrid solar lights are also connected to the external power grid. This serves as a backup power supply.




When the battery power runs lower than 10% in the night (<100Lux), the hybrid street lights get power from the grid, providing you with a reliable and consistent supply of light.

Solar Hybrid Light


AC/DC
HYBRID

KUPA

IP65 | CE | RoHS



Charging Time: 6-8H
Working Time: Microwave Sensor Mode: 10-12H
15% Brightness Constant Mode: 20H
AC Mode: Continuous Operation
Product Material: Die-cast Aluminum+Tempered Glass
Solar Panel Material: Monocrystalline Silicon + Glass Laminated
Cable Length: AC 30cm+DC 2m

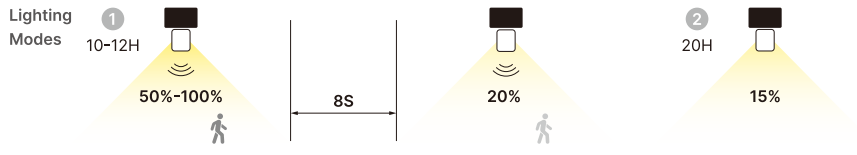

- EASY TO INSTALL
- MICROWAVE SENSOR
- BATTERY REMOVABLE
- DAYLIGHT SENSOR
- POWER DISPLAY
- INCLINED BRACKET
- AC+DC HYBRID
- WARRANTY 2 YEARS
- LIFESPAN 25,000H


Item No.	Power	Lumen	Battery	Product Size (L*H*W)	Solar Panel Size (L*H*W)
OSL-202A-25	AC24W / DC15W	AC 2200lm / DC 2500lm	LiFePO4 6.4V 12000mAh	180*250*30mm	284*394*17mm

IP65 | CE | RoHS


AC/DC
HYBRID

Solar Hybrid Light

NYX



Charging Time: 6-8H
Working Time: Microwave Sensor Mode: 10-12H
15% Brightness Constant Mode: 15H
AC Mode: Continuous Operation
Product Material: Die-cast Aluminum + PC Opal Diffuser
Solar Panel Material: Monocrystalline Silicon
Mounting: Pole (for 40-60mm pole)

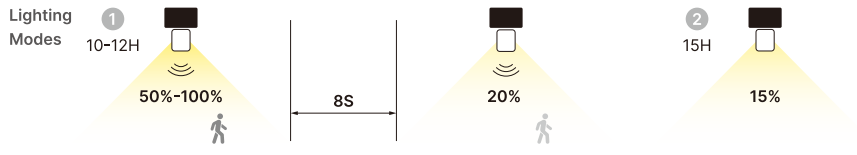

- EASY TO INSTALL
- SOLAR POWERED
- MICROWAVE SENSOR
- BATTERY REMOVABLE
- DAYLIGHT SENSOR
- REMOTE CONTROL
- AC+DC HYBRID
- WARRANTY 2 YEARS
- LIFESPAN 25,000H

Item No.	Power	Lumen	Battery	Product Size (φ*W)	Solar Panel Size (φ*W)
OSL-202A-25	AC24W / DC15W	AC 1200lm / DC 1500lm	LiFePO4 6.4V 8000mAh	φ380*130mm	φ343*3mm

02

SOLAR
FLOOD LIGHT



HIGHLIGHTS

I CORNER PROTECTOR

I POWER DISPLAY

I GOOD HEAT DISSIPATION

I ULTRA-THIN HOUSING

I REPLACEABLE BATTERY

I 3*1.0mm² RUBBER CABLE

IP65 | CE | RoHS




2 Available Models

Single White + Microwave Sensor
Item No. OFL-005A-X-02

3CCT + Microwave Sensor
Item No. OFL-005A-X-03 CCT



Charging Time: 5-6H
Working Time: 7-9H (Sensor Mode), 16H (15% Brightness)
Product Material: Die-cast Aluminum+Tempered Glass
Solar Panel Material: Glass Monocrystalline Silicon
Cable Length: 1M/2M

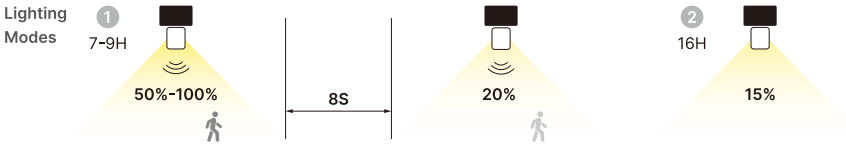

EASY TO INSTALL



MICROWAVE SENSOR



BATTERY REMOVABLE



DAYLIGHT SENSOR



POWER DISPLAY



INCLINED BRACKET



WARRANTY




CCT CHANGEABLE

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*H*W)
OFL-005A-20-02	15W	8W	2000lm	LiFePO4 6.4V 4000mAh	160*120*30mm	304*209*55mm
OFL-005A-30-02	22W	10W	3000lm	LiFePO4 6.4V 6000mAh	225*160*30mm	344*214*55mm
OFL-005A-50-02	36W	15W	5000lm	LiFePO4 6.4V 12000mAh	250*180*30mm	284*394*55mm
OFL-005A-30-03	21W	10W	2100lm	LiFePO4 6.4V 6000mAh	225*160*30mm	344*214*55mm
OFL-005A-50-03	30W	15W	3500lm	LiFePO4 6.4V 12000mAh	250*180*30mm	284*394*55mm


Solar Flood Light

LEK

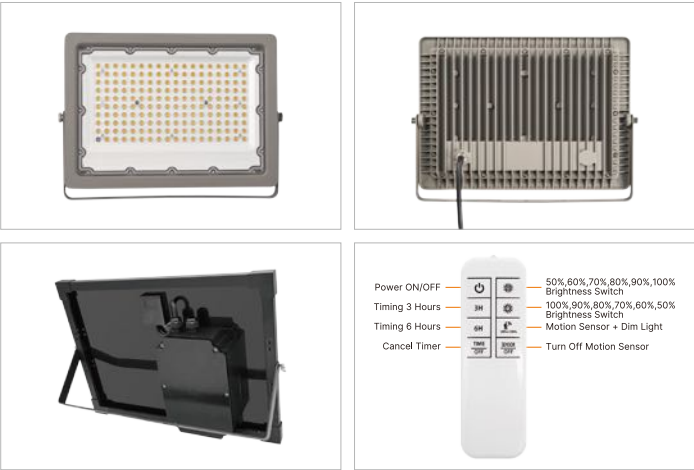

IP65 | CE | RoHS

Charging Time: 5-6H
Working Time: 7-9H (Sensor Mode), 16H (15% Brightness)
Product Material: Die-cast Aluminum+PC Optical Lens
Solar Panel Material: Glass Monocrystalline Silicon
Cable Length: 2M



SOLAR POWERED

MICROWAVE SENSOR

BATTERY REMOVABLE

DAYLIGHT SENSOR

REMOTE CONTROL

POWER DISPLAY

WARRANTY

LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*H*W)
OFL-003A-30	30W	8W	2000lm	LiFePO4 6.4V 4000mAh	225*160*30mm	304*209*55mm
OFL-003A-50	50W	10W	3000lm	LiFePO4 6.4V 6000mAh	250*180*30mm	344*214*55mm
OFL-003A-100	100W	15W	4000lm	LiFePO4 6.4V 12000mAh	295*228*30mm	284*394*55mm

Solar Flood Light

ENNS




4 Available Models

- Single White + PIR Motion Sensor
Item No. OFL-028P/028A-X-01
- Single White + Microwave Sensor
Item No. OFL-028P/028A-X-03
- 3CCT + PIR Motion Sensor
Item No. OFL-028P/028A-X-02 CCT
- 3CCT + Microwave Sensor
Item No. OFL-028P/028A-X-04 CCT



Charging Time: 8-9H
Working Time: 6-8H (Sensor Mode), 10-12H (10% Brightness)
Product Material: ABS/Die-cast Aluminum+Tempered Glass
Solar Panel Material: PET/ETFE/EPOXY RESIN Monocrystalline Silicon



PIR SENSOR

BATTERY REMOVABLE

DAYLIGHT SENSOR

POWER DISPLAY

INCLINED BRACKET

REMOTE CONTROL

WARRANTY

LIFESPAN

CCT CHANGEABLE

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*H*W)
OFL-028P-4	4W	1.5W	400lm	Li-ion 18650 3.7V 1200mAh	193*141*33mm	141*86mm
OFL-028P-7	7W	1.5W	700lm	Li-ion 18650 3.7V 1800mAh	193*141*33mm	141*86mm
OFL-028A-7	7W	1.5W	700lm	Li-ion 18650 3.7V 1800mAh	193*141*33mm	141*86mm
OFL-028A-10	10W	1.5W	1100lm	Li-ion 18650 3.7V 2600mAh	193*141*33mm	141*86mm
OFL-028A-13	13W	3.2W	1300lm	Li-ion 18650 3.7V 1800mAh	264*204*33mm	202*120mm
OFL-028A-18	18W	3.2W	1800lm	Li-ion 18650 3.7V 2600mAh	264*204*33mm	202*120mm

03

SOLAR
WALL LIGHT



HIGHLIGHTS

I SELECTABLE 3CCT BY SWITCH

I ULTRA-THIN DESIGN

I IP54 WATERPROOF

I PIR MOTION DETECTION

I 2 LIGHTING MODES

I BATTERY REPLACEABLE

IP54 | CE | RoHS

Solar Wall Light

NAICA



3
CM
THICKNESS



2 Available Models

Single White + PIR Motion Sensor
Item No. OWF-001P-8

3CCT + PIR Motion Sensor
Item No. OWF-001P-8 CCT

Availale Housing Color


White / Black

Charging Time: 4-6H

Working Time: 6-8H (Sensor Mode), 8-10H (10% Brightness)

Product Material: ABS+PC Cover

Solar Panel Material: PET Polycrystalline Silicon



EASY TO INSTALL



SOLAR POWERED



PIR SENSOR



ANGLE SENSOR



BATTERY REMOVABLE



DAYLIGHT SENSOR



WARRANTY



LIFESPAN



CCT CHANGEABLE

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*H*W)
OWF-001P-8	2.5W	2W	280lm	Li-ion 18650 1500mAh	181*123*30mm	163*94mm
OWF-001P-8 CCT	2.5W	2W	280lm	Li-ion 18650 1500mAh	181*123*30mm	163*94mm

Solar Wall Light

LANDES



IP54 | CE | RoHS

Charging Time: 4-6H

Working Time: 12H

Product Material: ABS+PC Optical Lens

Solar Panel Material: PET Monocrystalline Silicon

Lighting Modes

100% 10S 25%

- EASY TO INSTALL
- SOLAR POWERED
- RADAR SENSOR
- ANGLE SENSOR
- DAYLIGHT SENSOR
- COLLAPSIBLE
- WARRANTY
- LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*H*W)
OWF-004P-20	1.2W	1.2W	230lm	Li-ion 18650 1500mAh	130*190*102mm	119*93mm
OWF-004P-40	1.6W	1.6W	340lm	Li-ion 18650 1800mAh	178*185*105mm	167*93mm
OWF-004P-60	2.5W	2.5W	360lm	Li-ion 18650 3000mAh	229*185*105mm	219*93mm

Solar Wall Light

LILOU



IP65 | CE | RoHS

Charging Time: 4-6H

Working Time: 6-8H (Sensor Mode), 12H (25% Brightness)

Product Material: ABS+PC Cover

Solar Panel Material: Glass Monocrystalline Silicon

Lighting Modes

100% 20S OFF / 25% 25%

- EASY TO INSTALL
- SOLAR POWERED
- PIR SENSOR
- ANGLE SENSOR
- DAYLIGHT SENSOR
- COLLAPSIBLE
- WARRANTY
- LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OWF-002P-5	5W	1.5W	500lm	Li-ion 18650 3.7V 1800mAh	129*119*55mm	100*100mm

Solar Wall Light

BEXAR



IP54 | CE | RoHS | FCC

Charging Time: 8-9H

Working Time: 12H

Product Material: PC

Solar Panel Material: 5V 1.5W Monocrystal Silicon

Lighting Modes

1

100%

10S

OFF / 10%

2

10%

EASY TO INSTALL

SOLAR POWERED

PIR SENSOR

ANGLE SENSOR

BATTERY REMOVABLE

DAYLIGHT SENSOR

2 YEARS WARRANTY

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OWF-032P-4-01	4W	1.5W	1000lm	Li-ion 18650 3.7V 2000mAh	124*103*30mm	117.5*98.5mm
OWF-032P-8-01	8W	4.5W	1600lm	Li-ion 18650 3.7V 2000mAh	213*150*42mm	206.3*145.8mm

IP65 | CE | RoHS



Charging Time: 4-6H

Working Time: 6-8H (Sensor Mode), 12H (10% Brightness)

Product Material: ABS Shell+PC Cover

Solar Panel Material: PET Monocrystalline Silicon

Installation: All in one/Split

Cable Length: 2.8M

Lighting Modes

1

6-8H

100%

20S

OFF / 25%

2

12H

10%

EASY TO INSTALL

SOLAR POWERED

PIR SENSOR

ANGLE SENSOR

SPLIT DESIGN

DAYLIGHT SENSOR

REMOTE CONTROL

2 YEARS WARRANTY

25,000H LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OWF-023P-8	8W	1.5W	800lm	Li-ion 18650 3.7V 1800mAh	193*119*86mm	138*85mm

Solar Wall Light

SLIGO



Solar Wall Light

NEREO



IP54 | C E

Charging Time: 4-6H
Working Time: 6-8H (Sensor Mode), 12H (10% Brightness)
Product Material: PC
Solar Panel Material: Glass Polycrystalline Silicon/CdTe
Installation: All in one/Split
Cable Length: 4M

Lighting Modes

1 6-8H

100%

20S

OFF / 10%

2 12H

10%

- EASY TO INSTALL
- SOLAR POWERED
- PIR SENSOR
- ANGLE SENSOR
- SPLIT DESIGN
- DAYLIGHT SENSOR
- WARRANTY
- LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OWF-029P-12	12W	1.1W	1200lm	Li-ion 18650 3.7V 2000mAh	159*95*71mm	146*81mm

IP65 | C E



Charging Time: 4-6H
Working Time: 6-8H (Sensor Mode), 12H (10% Brightness)
Product Material: PC
Solar Panel Material: Glass Polycrystalline Silicon/CdTe
Cable Length: 3M

Lighting Modes

1 6-8H

100%

20S

OFF / 10%

2 12H

10%

- EASY TO INSTALL
- SOLAR POWERED
- PIR SENSOR
- ANGLE SENSOR
- SPLIT DESIGN
- DAYLIGHT SENSOR
- WARRANTY
- LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OWF-030P-10	10W	1W	1000lm	Li-ion 18650 3.7V 2000mAh	136*144*45mm	128*77mm

Solar Wall Light

DRACH



Solar Wall Light

MOGAO



IP54 | CE | RoHS

Charging Time: 6-8H

Working Time: 6-8H (Sensor Mode), 2-4H (100% Brightness)

Product Material: Stainless Steel

Solar Panel Material: EPOXY RESIN/PET Monocrystalline Silicon

Lighting Modes

1 6-8H 100%

30S

OFF

2 2-4H 100%

- 

EASY TO INSTALL
- 

SOLAR POWERED
- 

PIR SENSOR
- 

BATTERY REMOVABLE
- 

DAYLIGHT SENSOR
- 

HIGH CONVERSION
- 

2 YEARS WARRANTY
- 

25,000H LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (φ)
OWF-008S-01	0.6W	1.5W	15lm	Li-ion 14500 3.7V 600mAh	89*123*118mm	φ85mm
OWF-008S-02	0.6W	1.5W	50lm	Li-ion 14500 3.7V 600mAh	89*123*118mm	φ85mm

IP54 | CE | RoHS



Solar Wall Light

KESH

Charging Time: 6-8H

Working Time: 6-8H (Sensor Mode), 2-4H (100% Brightness)

Product Material: Stainless Steel

Solar Panel Material: EPOXY RESIN/PET Monocrystalline Silicon

Lighting Modes

1 6-8H 100%

30S

OFF

2 2-4H 100%

- 

EASY TO INSTALL
- 

SOLAR POWERED
- 

PIR SENSOR
- 

BATTERY REMOVABLE
- 

DAYLIGHT SENSOR
- 

HIGH CONVERSION
- 

2 YEARS WARRANTY
- 

25,000H LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OWF-031S-1-01	1W	0.6W	15lm	Li-ion 14500 600mAh	119*92*128mm	119*92mm
OWF-031S-1-02	1W	0.6W	50lm	Li-ion 14500 600mAh	119*92*128mm	119*92mm

Solar Wall Light

KARLA



IP54 | CE | RoHS

Charging Time: 6-8H

Working Time: 12H

Product Material: ABS+PC Cover

Solar Panel Material: PET Monocrystalline Silicon

Lighting Modes

12H

100%

30S

10%

- SOLAR POWERED
- PIR SENSOR
- ANGLE SENSOR
- BATTERY REMOVABLE
- BEAM ANGLE ADJUSTABLE
- DAYLIGHT SENSOR
- WARRANTY
- LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OWF-013P-1	1W	1W	80lm	Li-ion 18650 3.7V 1200mAh	130*110*100mm	85*85mm

IP54 | CE | RoHS



Charging Time: 4-6H

Working Time: 9-10H

Product Material: ABS

Solar Panel Material: Glass Monocrystalline Silicon

Lighting Modes

9-10H

OFF during the day

Automatically

ON at dusk

- EASY TO INSTALL
- SOLAR POWERED
- BEAM ANGLE ADJUSTABLE
- UP/DOWN LIGHT
- DAYLIGHT SENSOR
- HIGH CONVERSION
- WARRANTY
- LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OWF-018P-0.6	0.6W	1.1W*3	36lm	Li-ion 18650 3.7V 1500mAh	155*95*99mm	92*92mm

Solar Wall Light

JEWEL



04

SOLAR
SECURITY LIGHT


IP44 | CE | RoHS

Solar Security Light

LYELL



Charging Time: 4-6H
Working Time: 6-8H (Sensor Mode), 12H (10% Brightness)
Product Material: PC
Solar Panel Material: Glass Polycrystalline Silicon/CdTe
Cable Length: 4M



EASY TO INSTALL



SOLAR POWERED



PIR SENSOR



ANGLE SENSOR



BATTERY REMOVABLE



DAYLIGHT SENSOR



WARRANTY



LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OSC-005P-10	10W	2.1W	1000LM	Li-ion 18650 3.7V 1500mAh	200*160*180mm	160*130mm
OSC-005P-15	15W	2.1W	1500LM	Li-ion 18650 3.7V 1800mAh	285*160*180mm	160*130mm
OSC-005P-18	18W	2.1W	1800LM	Li-ion 18650 3.7V 2000mAh	350*160*180mm	160*130mm


Solar Security Light

AMER



IP54 | CE | RoHS

Charging Time: 6-8H
Working Time: 6-8H
Product Material: ABS+PC Cover
Solar Panel Material: Glass Polycrystalline Silicon
Cable Length: 3M




- 
EASY TO INSTALL
- 
SOLAR POWERED
- 
PIR SENSOR
- 
ANGLE SENSOR
- 
DAYLIGHT SENSOR
- 
ROTATABLE PIR SENSOR
- 
WARRANTY
- 
LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OSC-002P-6	6W	3W	600lm	Li-ion 18650 1200mAh	345*160*195mm	189*159mm

IP54 | CE | RoHS



Charging Time: 6-8H
Working Time: 6-8H
Product Material: ABS+PC Cover
Solar Panel Material: PET Polycrystalline Silicon



- 
EASY TO INSTALL
- 
SOLAR POWERED
- 
PIR SENSOR
- 
ANGLE SENSOR
- 
DAYLIGHT SENSOR
- 
WARRANTY
- 
LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OSC-001P-10	10W	1.5W	1000lm	Li-ion 18650 1200mAh	370*50*180mm	146*90mm

Solar Security Light

QUTUB




Solar Security Light

DOLDER



Charging Time: 6-8H
Working Time: 6-8H (Sensor Mode), 12H (10% Brightness)
Product Material: PC
Solar Panel Material: Glass Polycrystalline Silicon/CdTe
Cable Length: 4M

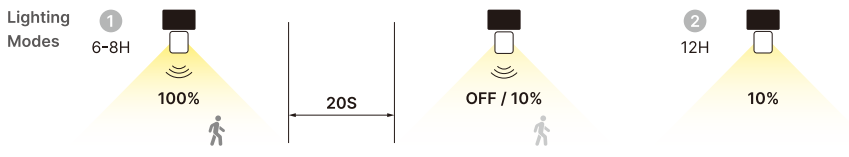

- EASY TO INSTALL
- SOLAR POWERED
- PIR SENSOR
- ANGLE SENSOR
- BATTERY REMOVABLE
- DAYLIGHT SENSOR
- WARRANTY
- LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OSC-006P-18	18W	2.1W	1800lm	Li-ion 18650 3.7V 2200mAh	348*165*122mm	165*133mm

IP44 | C E


IP65 | C E

Solar Security Light

OYSEL



Charging Time: 6-8H
Working Time: 6-8H (Sensor Mode), 12H (10% Brightness)
Product Material: PC
Solar Panel Material: Glass Polycrystalline Silicon

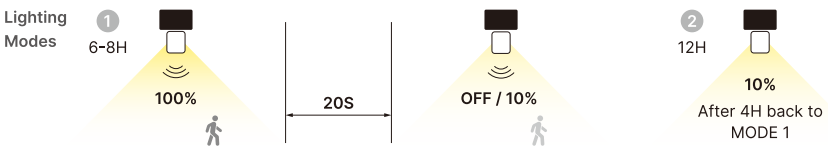

- EASY TO INSTALL
- SOLAR POWERED
- PIR SENSOR
- ANGLE SENSOR
- ROTATABLE
- DAYLIGHT SENSOR
- WARRANTY
- LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OSC-007P-10	10W	1W	1000lm	Li-ion 18650 3.7V 1800mAh	264*138*111mm	128*77mm

Solar Security Light

GELO



IP54 | C E

Charging Time: 8H (USB DC5V:5-6H)

Working Time: 6-8H (Sensor Mode), 12H (10% Brightness)

Product Material: ABS+PC Cover

Solar Panel Material: PET Monocrystalline Silicon

Lighting Modes

1 6-8H 100% 25S OFF / 10% 2 12H 10%

- 

EASY TO INSTALL
- 

SOLAR POWERED
- 

PIR SENSOR
- 

ANGLE SENSOR
- 

SPLIT DESIGN
- 

DAYLIGHT SENSOR
- 

TYPE C
- 

2 YEARS WARRANTY
- 

25,000H LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OSC-008P-10	10W	4W	1000lm	Li-ion 18650 3.7V 1800mAh	199*130*61mm	198*143mm

IP65 | C E



Charging Time: 5-8H

Working Time: 6-8H (Sensor Mode), 12H (10% Brightness)

Product Material: ABS+PC Cover

Solar Panel Material: PET Monocrystalline Silicon

Cable Length: 3M

Lighting Modes

1 6-8H 100% 20S OFF / 10% 2 12H 10% After 4H back to MODE 1

- 

EASY TO INSTALL
- 

SOLAR POWERED
- 

PIR SENSOR
- 

ANGLE SENSOR
- 

DAYLIGHT SENSOR
- 

2 YEARS WARRANTY
- 

25,000H LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OSC-003P-6	6W	1.5W	600lm	Li-ion 18650 3.7V 1800mAh	225*113*80mm	138*85mm

05

SOLAR
GARDEN LIGHT

IP54 | CE | RoHS

Solar Garden Light

VIKTEN



Charging Time: 6~8H (USB DC5V:3.5H)
Working Time: 8~10H (100% Brightness), 14~16H (50% Brightness)
Product Material: PC+PVC
Solar Panel Material: PET Monocrystalline Silicon
Number of Bulbs: 10 Bulbs

Lighting Modes

1 8-10H 100%

2 14-16H 50%

3 BREATHING

4 FLASHING

EASY TO INSTALL

SOLAR POWERED

BATTERY REMOVABLE

TYPE C

DAYLIGHT SENSOR

2 YEARS WARRANTY

LIFESPAN 25,000H

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L)	Solar Panel Size (L*W)
OOL-002-10	1.5W	2W	50lm	Li-ion 18650 3.7V 2000mAh	7.85M	120*83mm

Solar Garden Light

TAPIO




IP65 | CE | RoHS

Charging Time: 5-6H (USB DC5V:2H)

Working Time: 6-8H

Product Material: ABS Shell+PC Cover

Solar Panel Material: PET / ETFE Polycrystalline Silicon





EASY TO INSTALL



SOLAR POWERED



PIR SENSOR



ANGLE SENSOR



TYPE C



REMOTE CONTROL



CCT CHANGEABLE




RGB+CCT

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (φ*H)	Solar Panel Size (L*W)
LL01012	1.5W	1W	100lm	Li-ion 18650 3.7V 1200mAh	φ159.5*270mm	φ117.8*1.8mm
SLL01013	1W	1W	70lm	Li-ion 18650 3.7V 1200mAh	φ159.5*47.5mm	φ117.8*1.8mm

Solar Garden Light

AREG

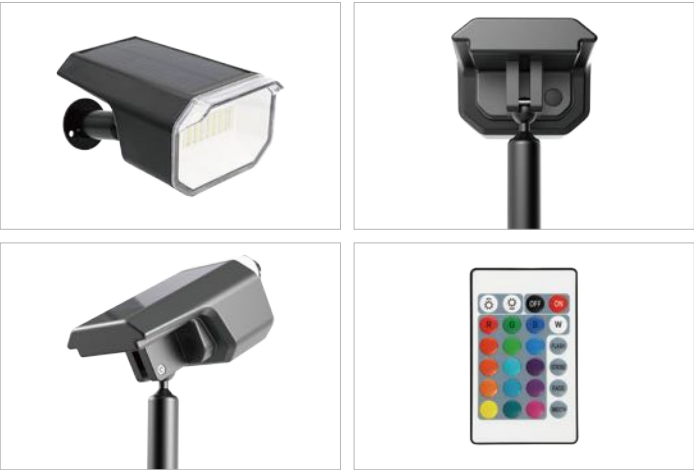

IP65 | CE | RoHS

Charging Time: 5-6H

Working Time: 6-8H

Product Material: ABS+PC Cover

Solar Panel Material: PET Polycrystalline Silicon /
PET Monocrystalline Silicon

4 Available Models

High Lumen + Microwave Sensor

Item No. OGD-006P-3-08

Single White Version

Item No. OGD-006P-1-05

3CCT Version

Item No. OGD-006P-1-06

RGB+W Version

Item No. OGD-006P-1-07



EASY TO INSTALL



SOLAR POWERED



MICROWAVE SENSOR



ADJUSTABLE ANGLE



REMOTE CONTROL



WARRANTY



LIFESPAN



CCT CHANGEABLE



RGB+W

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OGD-006P-3-08	3W	1W	600lm	Li-ion 18650 7.4V 800mAh	106*360*145mm	120*60mm
OGD-006P-1-05	1W	1W	50lm	Li-ion 18650 3.7V 1200mAh	106*360*145mm	120*60mm
OGD-006P-1-06	1W	1W	50lm	Li-ion 18650 3.7V 1200mAh	106*360*145mm	120*60mm
OGD-006P-1-07	1W	1W	50lm	Li-ion 18650 3.7V 1200mAh	106*360*145mm	120*60mm


Solar Garden Light

DIMU



IP44 | CE | RoHS

Charging Time: 6~8H
Working Time: 6~8H
Product Material: Stainless Steel+ABS
Solar Panel Material: Glass Monocrystalline Silicon

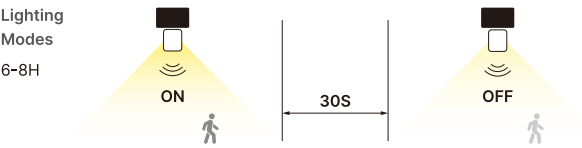



EASY TO INSTALL



SOLAR POWERED



PIR SENSOR



ANGLE SENSOR



BATTERY REMOVABLE



DAYLIGHT SENSOR



HIGH CONVERSION



2 YEARS




25,000H

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (φ)
OGD-026S-3	3W	1.5W	180lm	Li-ion 18650 3.7V 2000mAh	235*150*163mm	φ140mm
OGD-002S-3	3W	2.5W	250lm	Li-ion 18650 3.7V 4000mAh	235*210*163mm	φ200mm

IP44 | CE | RoHS



Charging Time: 6~8H
Working Time: 6~8H
Product Material: Stainless Steel+ABS
Solar Panel Material: Glass Monocrystalline Silicon

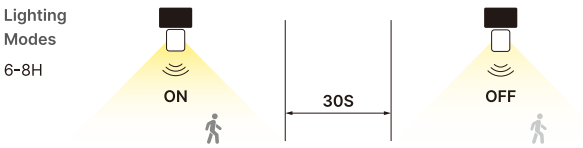



EASY TO INSTALL



SOLAR POWERED



PIR SENSOR



ANGLE SENSOR



BATTERY REMOVABLE



DAYLIGHT SENSOR



HIGH CONVERSION



2 YEARS



25,000H

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (φ)
OGD-026S-3	3W	1.5W	180lm	Li-ion 18650 3.7V 2000mAh	150*150*370mm	φ140mm
OGD-002S-3	3W	2.5W	250lm	Li-ion 18650 3.7V 4000mAh	210*210*370mm	φ200mm

Solar Garden Light

DIMU




Solar Torch Light


JIK



IP54 | CE | RoHS

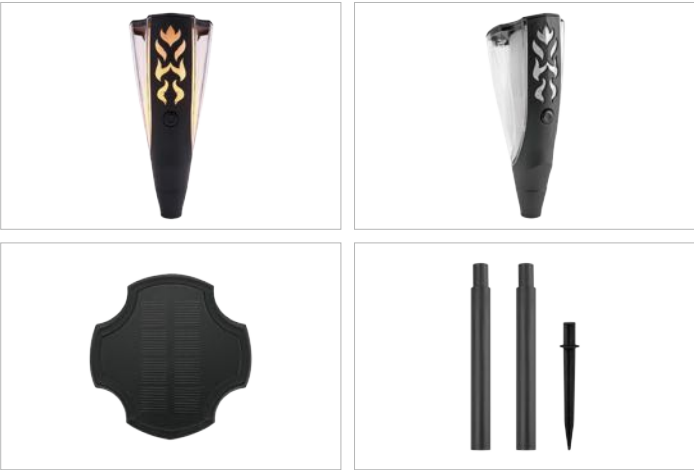

Charging Time: 6~8H
Working Time: 12H
Product Material: ABS+PC
Solar Panel Material: PET Monocrystalline Silicon




- EASY TO INSTALL
- SOLAR POWERED
- DAYLIGHT SENSOR
- HEIGHT ADJUSTABLE
- WARRANTY
- LIFESPAN
- 1600K

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (φ*H)	Solar Panel Size (φ*H)
OGD-021P-0.1	0.1-0.2W	0.35W	15-20lm	Ni-Mh AA 1.2V 800mAh	φ79*649mm	φ70*2mm

IP54 | CE | RoHS



Charging Time: 6~8H
Working Time: 12H
Product Material: ABS+PC
Solar Panel Material: PET Monocrystalline Silicon



- EASY TO INSTALL
- SOLAR POWERED
- DAYLIGHT SENSOR
- HEIGHT ADJUSTABLE
- WARRANTY
- LIFESPAN
- 1600K

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (φ*H)	Solar Panel Size (φ*H)
OGD-022P-0.1	0.1-0.2W	0.35W	15-20lm	Ni-Mh AA 1.2V 800mAh	φ75*645mm	φ70*2mm

Solar Torch Light

NEI



06



SOLAR

STREET LIGHT



HIGHLIGHTS

- I IP65 WATERPROOF & DURABLE
- I FASTER SOLAR PANEL CHARGING
- I LIGHT SENSOR & MICROWAVE SENSOR
- I EASY CORDLESS INSTALLATION
- I 360° LIGHTING, FULL EXPERIENCE
- I LARGE CAPACITY & REPLACEABLE BATTERY


IP65 | CE | RoHS

Solar Street Light

NYX



Charging Time: 5-6H
Working Time: 6-8H (Sensor Mode), 12H (15% Brightness)
Product Material: Aluminum Shell+PC cover
Solar Panel Material: Glass Monocrystalline Silicon
Pole Size: Φ 40-60mm

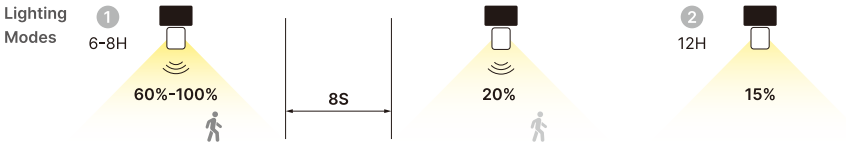

EASY TO INSTALL



SOLAR POWERED



MICROWAVE SENSOR



BATTERY REMOVABLE



DAYLIGHT SENSOR



REMOTE CONTROL



WARRANTY



LIFESPAN



CCT CHANGEABLE

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (φ*W)	Solar Panel Size (φ*W)
OSL-002A-25	25W	10W	2500lm	LiFePO4 3.2V 6000mAh	380*125mm	342*4mm
OSL-002A-25 CCT	25W	10W	1800lm	LiFePO4 3.2V 6000mAh	380*125mm	342*4mm

Solar Street Light

NYHAVN



IP65 | CE | RoHS

Charging Time: 7-8H

Working Time: 15H

Product Material: Aluminum+PC

Solar Panel Material: Glass Monocrystalline Silicon

Lighting Modes

1

100%

8S

10%

2

1H 70%
3H 50%
6H 35%-15%

3

2H OFF /
4H OFF /
6H OFF

- EASY TO INSTALL
- SOLAR POWERED
- MICROWAVE SENSOR
- ANGLE SENSOR
- BATTERY REMOVABLE
- REMOTE CONTROL
- DAYLIGHT SENSOR
- WARRANTY
- LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OSR-001A-100	100W	20W	1200lm	LiFePO4 3.2V 18000mAh	552*282*130mm	500*279mm
OSR-001A-180	180W	30W	2200lm	LiFePO4 3.2V 24000mAh	657*325*130mm	607*320mm
OSR-001A-240	240W	40W	3000lm	LiFePO4 3.2V 30000mAh	855*350*130mm	850*345mm

Solar Street Light

BICA



IP65 | CE | RoHS



Charging Time: 7-8H

Working Time: 15H

Product Material: Aluminum+PC

Solar Panel Material: Glass Monocrystalline Silicon

Lighting Modes

1

100%

8S

10%

2

1H 70%
3H 50%
6H 35%-15%

3

2H OFF /
4H OFF /
6H OFF

- EASY TO INSTALL
- SOLAR POWERED
- MICROWAVE SENSOR
- ANGLE SENSOR
- BATTERY REMOVABLE
- REMOTE CONTROL
- DAYLIGHT SENSOR
- WARRANTY
- LIFESPAN

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
OSR-002A-60	60W	20W	800lm	LiFePO4 3.2V 18000mAh	570*200*80mm	464*172mm
OSR-002A-120	120W	30W	1500lm	LiFePO4 3.2V 24000mAh	765*200*80mm	620*172mm
OSR-002A-180	180W	40W	2200lm	LiFePO4 3.2V 30000mAh	1060*200*80mm	921*172mm

07

SOLAR
ROAD STUD LIGHT



Solar Road Stud Light

FURKA



IP68 | CE | RoHS | FCC

Charging Time: 50H

Working Time: 16H

Product Material: Aluminum

Solar Panel Material: 3V / 90mA Monocrystalline Silicon

Lighting Modes

ON
Flashing

16H

OFF

- EASY TO INSTALL
- SOLAR POWERED
- AUTO ON/OFF
- ANGLE SENSOR
- DAYLIGHT SENSOR
- WARRANTY

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
ORS-001A-1-01	1W	0.27W	Flashing mode	1.2V / 600mAh High-Temperature Ni-MH	110*100*23mm	55*36mm
ORS-001A-1-02	1W	0.27W	Flashing mode	1.2V / 600mAh High-Temperature Ni-MH	110*100*23mm	55*36mm

Solar Road Stud Light

VENCE



IP68 | CE | RoHS | FCC



Charging Time: 50H

Working Time: 16H

Product Material: Aluminum

Solar Panel Material: 3V / 90mA Monocrystalline Silicon

Lighting Modes

ON
Flashing

16H

OFF

- EASY TO INSTALL
- SOLAR POWERED
- AUTO ON/OFF
- ANGLE SENSOR
- DAYLIGHT SENSOR
- WARRANTY

Item No.	Power	Solar Panel Power	Luminous Flux	Battery	Product Size (L*H*W)	Solar Panel Size (L*W)
ORS-002A-1-01	1W	0.27W	Flashing mode	1.2V / 600mAh High-Temperature Ni-MH	115*100*22mm	55*36mm

Innovation and sustainability for everyone



GRACE (NINGBO) LIGHTING CO., LTD.

No.3, Building 1, No.818, Qiming Road, Yinzhou District, Ningbo, 315104, China
+86-574-89251937 | info@gracelighting.net | www.gracelighting.net